





tru ENERGY EFFICIENCY

APPROVED FOR ALL DIESEL SCR SYSTEMS

DIESEL EXHAUST FLUID

truDEF is a premier brand of diesel exhaust fluid & is proud to offer this trusted emission-control solution to its customers. truDEF is a diesel exhaust fluid manufactured with 32.5% high purity synthetic urea and 67.5% deionized water designed for use in passenger vehicles, trucks, construction and agricultural equipment.



APPLICATIONS

truDEF is registered with the American Petroleum Institute (API) as a certified quality product. **truDEF** meets or exceeds **ISO 22241** and **AdBlue** standards. All batches are thoroughly tested for quality assurance at the time of manufacture. All **truDEF** products are proudly MADE IN THE USA.









SUPPLY PRO



TYPICAL TECHNICAL PROPERTIES

PROPERTY	truDEF	
Boiling Point	>212°F	
Crystallization Point	12°F	
Pounds/Gallons	9.10	
Specific Gravity	(Water = 1) 1.09	
Vapor Density Water	(Air = 1) 0.6 H ² O >1	
Solubility	100%	
Appearance	Colorless Clear Liquid	
Odor	None to Slight Ammonia	



	SKUS	PACKAGE SIZE	SKUS	PACKAGE SIZE
	02302709800DEF050	1/2.5G	02302709800DEF097	CLOSED DRUM
	02302709800DEF051	2/2.5G	02302709800DEF096	OPEN DRUM
	02302709800DEF124	4/1G	02302709800DEF112	CLOSED TOTE
4	02302709800DEF082	5G PAIL	02302709800DEF111	OPEN TOTE
			02302709800DEF116	BULK



PACKAGING



1/2.5 **GALLON**





5 GALLON PAIL



55 GALLON DRUM



TOTE




SCAN THE QR CODE TO ORDER THIS PRODUCT **TODAY!**







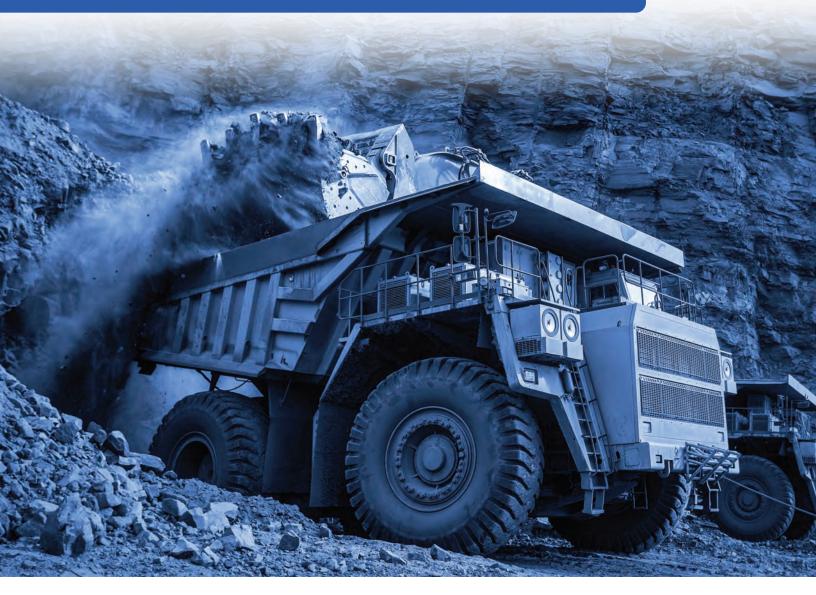

WHAT IS truDEF MADE OF?

truDEF is a high - purity, 32.5% strength urea solution and deionized water.

IS truDEF HAZARDOUS?

truDEF is not hazardous, toxic or flammable.

DOES IT NEED TO MEET ANY QUALITY STANDARDS?

Yes, truDEF meets the ISO 22241 quality standards.





115 Empire Way SW, ATLANTA, GA 30354 - 1.833.343.1510 info@supplyprol.com